


Emergency Luminaire Klick-Klack 711.1. CG-S, 711.1



711.1 CG-S with clear cover





711.1 CG
with cover PR

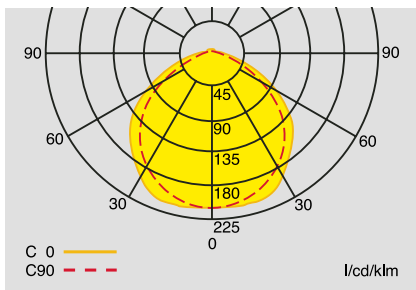

Polar curve 711.1 CG-S

Dimensions (mm)

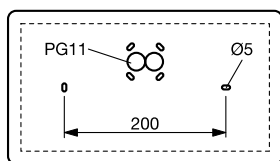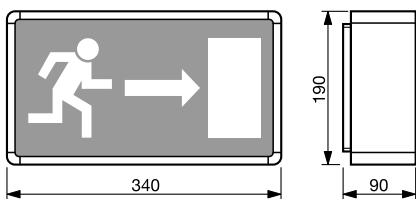




Technical data

SL/RZ 711.1 CG / SL/RZ 711.1

Viewing distance	34 m
Luminous flux Φ_E/Φ_N at the end of rated operating time	75 %
Enclosure material	Aluminium/plastic
Weight incl. cover	1.62 kg
Enclosure colour	silver
Type of mounting	Wall and ceiling mounting
Dimensions (mm) (L x H x D)	340 x 190 x 90
Connection terminals	Loop terminals 3 x 2.5 mm ²
Voltage ranges	230 V 50/60 Hz, 220 V DC +25/-20 %
Current consumption (220 V battery)	30 mA
Power consumption	16 VA
Permissible temperature range	-10°C to + 40°C
Lamp	8 W/T16, 450 lm
Insulation class	II
Degree of protection	IP 40

Ordering details

Type	Scope of supply	Order No.
711.1 CG-S	Luminaire with CEWA GUARD monitoring and 20 digit address switch, without cover	4 0071 345 031
711.1	Luminaire without cover	4 0071 345 030
Cover SL	Clear cover	4 0071 345 043
Cover PR	Cover with silk screened legend 	4 0071 345 041
Cover PL	Cover with silk screened legend 	4 0071 345 040
Cover PU	Cover with silk screened legend 	4 0071 345 042

Accessories

Type	Order No.
Wire guard	4 0071 344 822

Lighting engineering (with 8 W/T16, 450 lm lamp)

Measuring level: 0.02 m, incl. 25 % ageing factor

Engineering help 711.1. 711.1 CG-S. with clear cover for E = 1.25 lx (0.625 lx)

Mounting height (m)	Types of mounting	Mounting distances (m)			
		L1	L2	L3	L4
2.5	Ceiling mounting	3.2 (3.9)	7.8 (9.2)	3.5 (4.3)	8.6 (10.4)
3.0	Escape route centre	3.5 (4.3)	8.6 (10.2)	3.7 (4.7)	9.4 (11.4)
4.0		3.7 (4.8)	9.6 (11.8)	3.9 (5.2)	10.4 (13.0)
5.0		3.6 (5.1)	10.2 (13.0)	3.8 (5.5)	11.0 (14.0)
6.0		3.2 (5.2)	10.4 (13.8)	3.5 (5.5)	11.0 (14.8)
7.0		2.5 (5.1)	10.0 (14.4)	2.9 (5.4)	10.6 (15.4)
2.0	Wall mounting	2.0 (2.5)	5.0 (6.2)	2.0 (2.7)	5.4 (6.8)
2.5		1.7 (2.4)	4.8 (6.2)	0.1 (2.5)	4.8 (6.6)
3.0		1.2 (2.2)	4.4 (6.0)	0.1 (0.1)	3.6 (6.2)
3.0	Ceiling mounting	2.8 (3.4)	7.6 (9.4)	3.2 (4.5)	7.8 (9.2)
4.0	Area illumination	3.4 (4.0)	8.4 (10.8)	3.5 (3.9)	9.2 (10.6)
5.0		3.4 (4.4)	9.4 (11.4)	3.5 (4.5)	9.6 (12.4)
6.0		2.4 (4.4)	10.0 (12.4)	3.5 (4.5)	10.0 (13.2)
7.0		2.4 (4.4)	10.4 (13.4)	2.5 (4.5)	10.2 (13.6)

Emergency Luminaire Klick-Klack 721 CG-S, 721



721 CG-S

Technical data

721 CG-S / RZ 721

Viewing distance	34 m	
Enclosure material	Aluminium/plastic	
Weight incl. cover	2.05 kg	
Enclosure colour	silver	
Type of mounting	Wall mounting	Wall bracket
	Ceiling mounting without mounting accessories	Pendulum, wall bracket or chain
Dimensions (mm) (L x H x D)	340 x 190 x 80	
Connection terminals	Loop terminals 3 x 2.5 mm ²	
Voltage ranges	230 V 50/60 Hz, 220 V DC +25/-20 %	
Current consumption (220 V battery)	30 mA	
Power consumption	16 VA	
Permissible temperature range	-10°C to + 40°C	
Lamp	8 W/T16, 450 lm	
Insulation class	I	
Degree of protection	IP 20	

Ordering details

Type	Scope of supply	Order No.
721 CG-S	Luminaire with CEWA GUARD monitoring and 20 digit address switch, without covers	4 0071 345 143
721	Luminaire without covers	4 0071 345 142
Cover PR	Cover with silk screened legend	4 0071 345 041
Cover PL	Cover with silk screened legend	4 0071 345 040
Cover PU	Cover with silk screened legend	4 0071 345 042
Cover SL	Clear cover	4 0071 345 043
Dummy cover		4 0071 345 255

Each luminaire requires 2 covers.

Accessories

Type	Scope of supply	Order No.
Pendulum set	0.5 m with wall bracket, silver, square form	4 0071 344 599
Wall bracket		4 0071 342 473
Ceiling mounting	with wall bracket	4 0071 342 718
Chain suspension kit	Mounting set for chain suspension, without chain	4 0071 342 520

Dimensions (mm)

