


...→ METRIC THREAD SPIRAL CABLE GLANDS

→ PG THREAD SPIRAL CABLE GLANDS

→ METRIK THREAD SPIRAL CABLE GLANDS

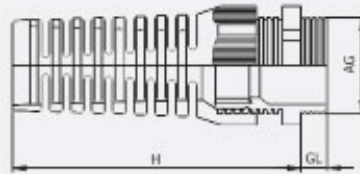

→ Material	Polyamide 6
→ Colour	RAL 7001 (Gray) RAL 7035 (L. Gray) RAL 9005 (Black)
→ Protection Class	IP 68
→ Permanent operational temp.	- 40 C to + 100 C
→ Short term max. Operational temp.	+150 C
→ Seal	Thermoplastic Rubber

METRIC THREAD SPIRAL CABLE GLANDS

AG Thread	Gray Code	L. Gray Code	Black Code	H mm.	GL mm.	mm.	Clamping Range
M12x1,5	OMRG-17	OMRL-17	OMRB-17	57,2	8	15	3-6,5
M16x1,5	OMRG-18	OMRL-18	OMRB-18	70,4	8	19	4-8
M16x1,5	OMRG-19	OMRL-19	OMRB-19	81,3	10	22	5-10
M20x1,5	OMRG-20	OMRL-20	OMRB-20	89,2	10	24	6-12
M20x1,5	OMRG-21	OMRL-21	OMRB-21	107,2	10	27	10-14
M25x1,5	OMRG-22	OMRL-22	OMRB-22	124,3	10	33	13-18

METRIC LONG THREAD SPIRAL CABLE GLANDS

M16x1,5	OMRG-23	OMRL-23	OMRB-23	81,3	15	22	5-10
M20x1,5	OMRG-24	OMRL-24	OMRB-24	89,2	15	24	6-12
M20x1,5	OMRG-25	OMRL-25	OMRB-25	107,2	15	27	10-14
M25x1,5	OMRG-26	OMRL-26	OMRB-26	124,3	15	33	13-18