


...→ **PG THREAD SPIRAL CABLE GLANDS**

→ **PG THREAD SPIRAL CABLE GLANDS**

→ **METRIK THREAD SPIRAL CABLE GLANDS**

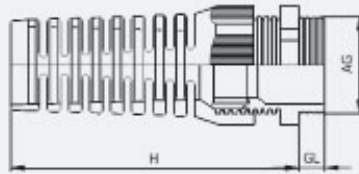

→ Material	Polyamide 6
→ Colour	RAL 7001 (Gray) RAL 7035 (L. Gray) RAL 9005 (Black)
→ Protection Class	IP 68
→ Permanent operational temp.	- 40 C to + 100 C
→ Short term max. Operational temp.	+150 C
→ Seal	Thermoplastic Rubber

PG THREAD SPIRAL CABLE GLANDS

AG Thread	Gray Code	L. Gray Code	Black Code	H mm.	GL mm.	mm.	Clamping Range
PG 7	ORG-19	ORL-19	ORB-19	57,2	8	15	3-6,5
PG 9	ORG-20	ORL-20	ORB-20	70,4	8	19	4-8
PG 11	ORG-21	ORL-21	ORB-21	81,3	8	22	5-10
PG 13,5	ORG-22	ORL-22	ORB-22	89,2	9	24	6-12
PG 16	ORG-23	ORL-23	ORB-23	107,2	9	27	10-14
PG 21	ORG-24	ORL-24	ORB-24	124,3	11	33	13-18