


...→ WIRE CONNECTORS

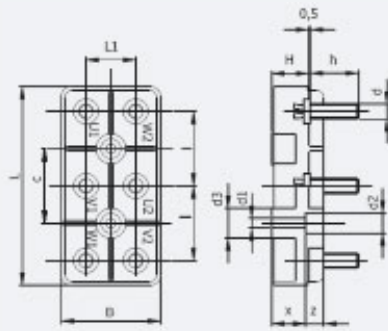

- **Material** Polyamide 6 Vo + Glass Fibre reinforced
- **Colour** RAL 7001 (Gray)
RAL 7035 (L.Gray)
RAL 9005 (Black)
- **Permanent operational temp.** - 40 C to +120 C
- **Short term max. operational temp.** + 150 C

WIRE CONNECTORS

Type	Code	L	B	H	l	l1	c	d	h	x	z	d1	d2	d3
56-63	MK 01	40	25	8,5	15	15	15	M4	13	4	6	4,5	8	11
71-80	MK 02	50	30	8,5	20	20	20	M4	15	4	7,5	6,3	10,5	14,8
132	MK 03	60	37	10	23	23	23	M5	19	6,5	7,5	6,3	10,5	14,8
160-180	MK 04	72	44	12	28	28	28	M6	24	8,5	7,5	6,5	10,5	15,8
225-250	MK 05	91	56	12,5	35	35	35	M8	28	10	7,5	6,5	10,5	15,8
280	MK 06	115	70	15,5	45	45	45	M10	34	10,5	11	9,5	15,5	21,8